

MODEL NUMBER

81-20524-A2

PRODUCT LINE


GO™ Switch Model 81

SPECIFICATIONS

| | |
|------------------------|---------------------------|
| Model | 81 Model |
| Contact Form | DPDT (Form CC) |
| Sensing Range | Approx. 1/4" end sensing |
| Outlet Position | Bottom of enclosure |
| Enclosure Material | Stainless steel |
| Area Classification | CSA/FM CI 1, Div 1 |
| Wiring Options | 3ft PVC lead wires |
| Regional Certification | no regional certification |
| Custom field | |

WIRING DIAGRAM

PVC/PTFE LEADS – 7 WIRE
DPDT

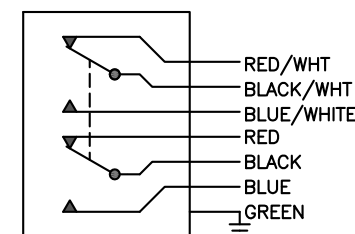

Current as of April 20, 2018 – Subject to change without notice.

NAMEPLATE



CL I DIV 1, GRPS A,B,C,D; CL II DIV 1, GRPS E,F,G; CL III;
ELECTRICAL RATING: 120VAC/10A, 24VDC/3A RESISTIVE; 600VAC MAX
LEAD SEAL IS REQUIRED WITHIN 18" OF ENCLOSURE.

Model #:

Serial #:

GO
SWITCH

TOPWORX™

3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com

www.actuation.co.uk
tel: +44 (0)151 547 1221
sales@actuation.co.uk