

**MODEL NUMBER**

11-12120-00


**PRODUCT LINE**

GO™ Switch 10/20 Series

**SPECIFICATIONS**

Model	11 Model
Contact Form	SPDT (Form C)
Sensing Range	Extended approx. 9/16" side
Outlet Position	Behind sensing area
Enclosure Material	Stainless steel
Area Classification	CSA/FM CI I, Div 2
Wiring Options	Terminal block - 1/2" NPT
Regional Certification	No regional certification
Custom Field	

**WIRING DIAGRAM**

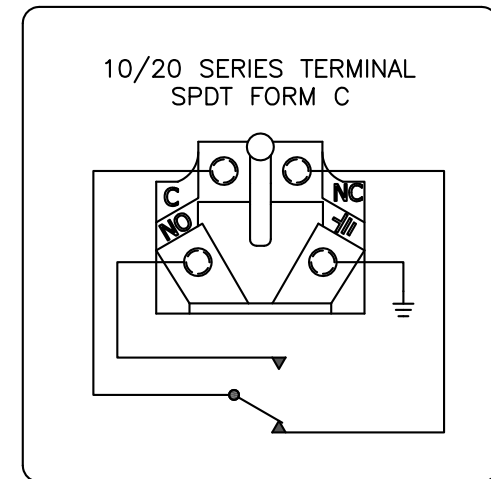

Current as of April 20, 2018 – Subject to change without notice.

**NAMEPLATE**



CL I DIV 2, GRPS A,B,C,D; CL II DIV 1, GRPS E,F,G, CL III, TYPE 4X  
 T<sub>1</sub>/T<sub>2</sub>: 50°C ≤ T<sub>a</sub> ≤ 60°C/98°C  
 ELECTRICAL RATING: 120VAC/10A, 24VDC/3A RESISTIVE, 480VAC/24VDC MAX.  
 LEAD SEAL IS REQUIRED WITHIN 18" OF ENCLOSURE.  
 CAUTION: KEEP COVER TIGHT WHILE CIRCUITS ARE LIVE.

Model #: Serial #:



**TOPWORX**

3300 Fern Valley Road  
 Louisville, KY 40213

(502)969-8000 PH  
 (502)969-5911 FAX  
 www.topworx.com

**www.actuation.co.uk**  
**tel: +44 (0)151 547 1221**  
**sales@actuation.co.uk**