

# Brass Swing Check Valve - Metal / Rubber Seated

AV 2250 & AV 2251

Screwed **BSPP**

**AV 2250 - Metal Seated**


**AV 2251 - NBR Seat**




Pressure / Temperature Specifications	
Pressure	3/8" to 3" PN16
	4" PN10
Temperature	-10°C to 100°C

Materials		
1	Body	Brass
2	Plug	Brass
3	O-ring	NBR
4	Swing	Brass
5	Seat	NBR (LV 2251 only)

Dimensions			
G	H	L	Kg
3/8"	32	47	0.17
1/2"	32	47	0.15
3/4"	35	54	0.21
1"	39	64	0.33
1 1/4"	47	75	0.49
1 1/2"	51	83	0.65
2"	59	98	1.0
2 1/2"	67	116	1.56
3"	77	135	2.24
4"	92	164	3.8

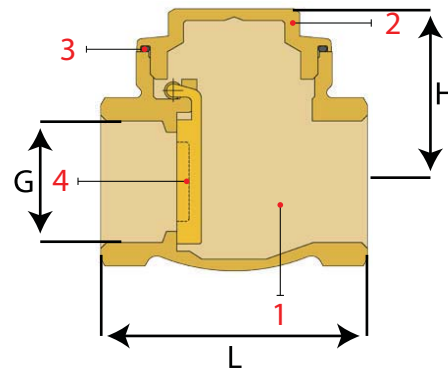

**AV 2250**

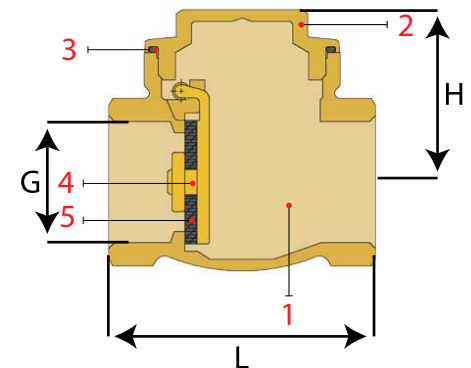

**AV 2251**

All information is sourced from our manufacturer's data and is intended for guidance only - Leengate Valves can accept no liability for changes, omissions or errors.