
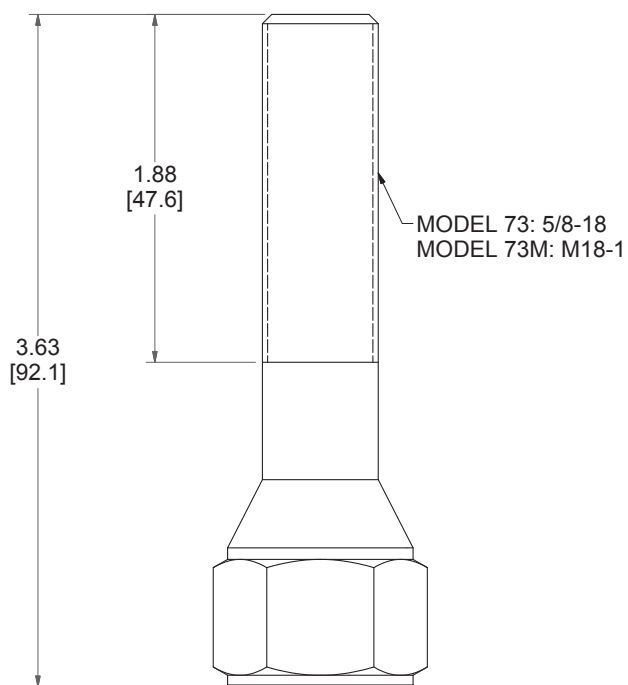

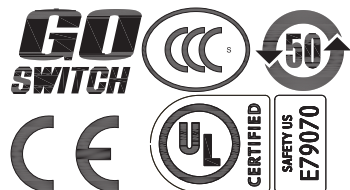


73-13563-B2

GO™ Switch 70 Series Hex Head

Model	73 Model
Contact Form	SPDT
Sensing Range	0.100" end sensing
Outlet Position	Bottom of enclosure
Enclosure Material	316L Stainless Steel
Area Classification	UL Cl I, Div 1
Wiring Option	PVC cable, 3ft
Regional Certification	No Regional Certification
Custom Field	

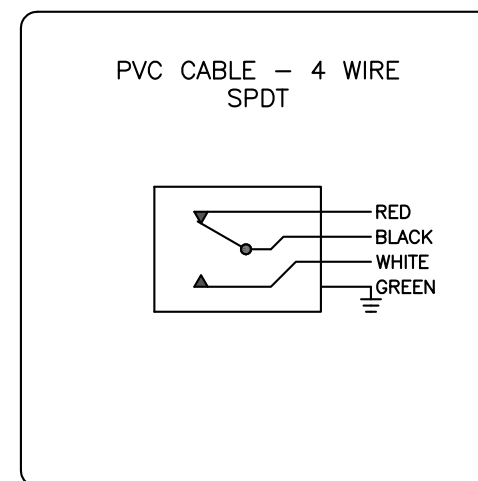

Ind. Cont. Eq. for Hazardous Locations
Class I, Division 1, Groups A,B,C,D; Type 4X
Class II, Division 1, Groups E,F,G; Class III
120VAC/4A; 24VDC/3A Resistive
Conduit: 1/2 NPT - Lead Seal Required



Current as of April 20, 2018 – Subject to change without notice.

www.actuation.co.uk
tel: +44 (0)151 547 1221
sales@actuation.co.uk