



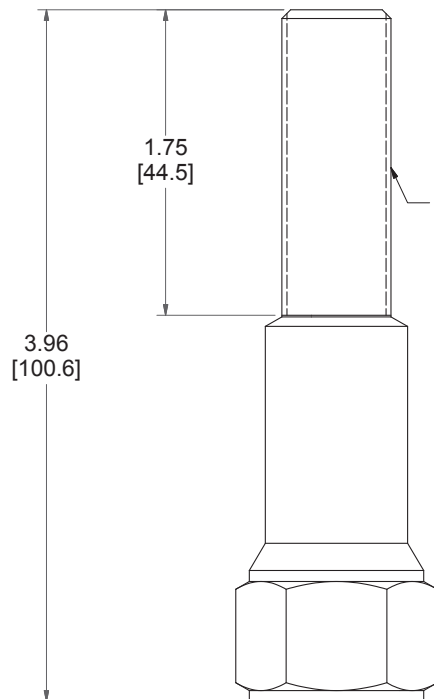

MODEL 7G: 5/8-18
MODEL 7GM: M18-1



MODEL NUMBER

7G-23563-B2

PRODUCT LINE


GO™ Switch 70 Series Hex Head

SPECIFICATIONS

Model	7G Model
Contact Form	DPDT
Sensing Range	0.100" end sensing
Outlet Position	Bottom of enclosure
Enclosure Material	316L Stainless Steel
Area Classification	UL Cl I, Div 1
Wiring Option	PVC cable, 3ft
Regional Certification	No Regional Certification
Custom Field	


WIRING DIAGRAM

PVC CABLE — 7 WIRE
DPDT

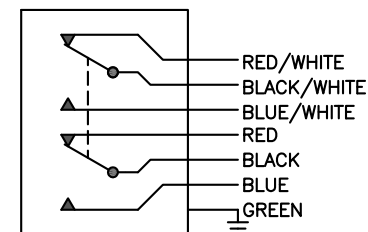

Current as of April 20, 2018 – Subject to change without notice.

NAMEPLATE

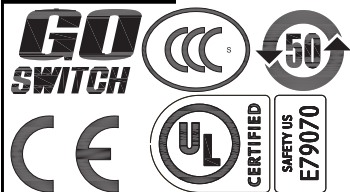

Ind. Cont. Eq. for Hazardous Locations
Class I, Division 1, Groups A,B,C,D; Type 4X
Class II, Division 1, Groups E,F,G; Class III
120VAC/3A; 24VDC/1A Resistive
Conduit: 1/2 NPT - Lead Seal Required



TOPWORX™

3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com

www.actuation.co.uk
tel: +44 (0)151 547 1221
sales@actuation.co.uk