


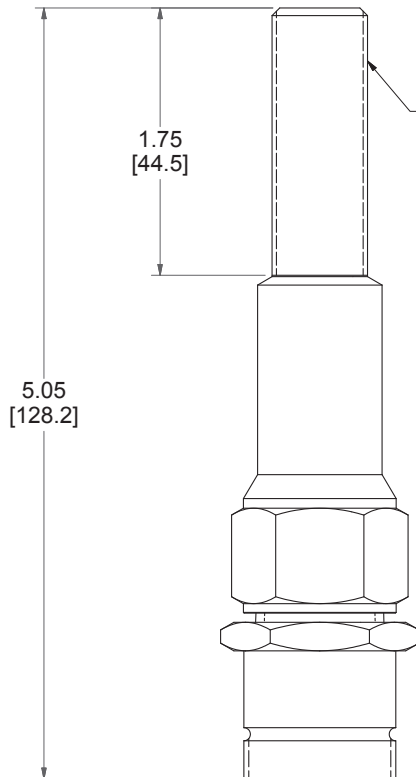




MODEL 7G: 5/8-18
MODEL 7GM: M18-1

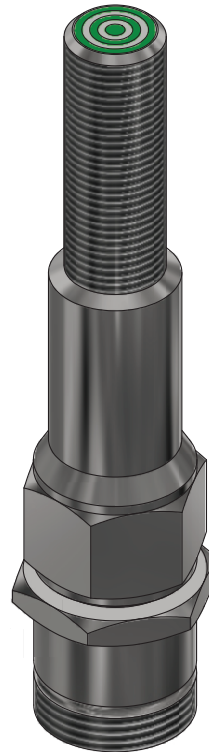

NAMEPLATE



Industrial Control Equipment
Type 4X
120VAC/3A; 24VDC/1A Resistive
Conduit: 1/2 NPT



MODEL NUMBER

7G-23568-DCH

PRODUCT LINE


GO™ Switch 70 Series Hex Head

SPECIFICATIONS

Model	7G Model
Contact Form	DPDT
Sensing Range	0.100" end sensing
Outlet Position	Bottom of enclosure
Enclosure Material	316L Stainless Steel
Area Classification	UL General Purpose
Wiring Option	QDC, Mini, 7 pin
Regional Certification	No Regional Certification
Custom Field	

WIRING DIAGRAM

7 PIN MINI CONNECTOR — DCD
DPDT FORM CC



PIN 1 — N/O2(BLK/WHT) PIN 4 — N/C1(RED)
PIN 2 — COM1(BLK) PIN 5 — COM2(ORG)
PIN 3 — N/C2(WHT) PIN 6 — N/O1(BLU)
PIN7 — GND(GRN)

Current as of April 20, 2018 — Subject to change without notice.

TOPWORX

3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com

www.actuation.co.uk
tel: +44 (0)151 547 1221
sales@actuation.co.uk