



C/ SEVERO OCHOA, 11 28914 LEGANES MADRID ESPAÑA
TLF. +34 916 857 365 www.ttv.es válvulas@ttv.es

VÁLVULA DE MARIPOSA RANURADA


Presión de trabajo: PN10, PN16





Distancia entre caras: PN10, PN16

Conexión entre tuberías: ANSI B3610, ISO 4200,
DIN 2448, BS 1387, BS 3600

Pruebas: ISO 5208

Brida de cabeza: ISO 5211

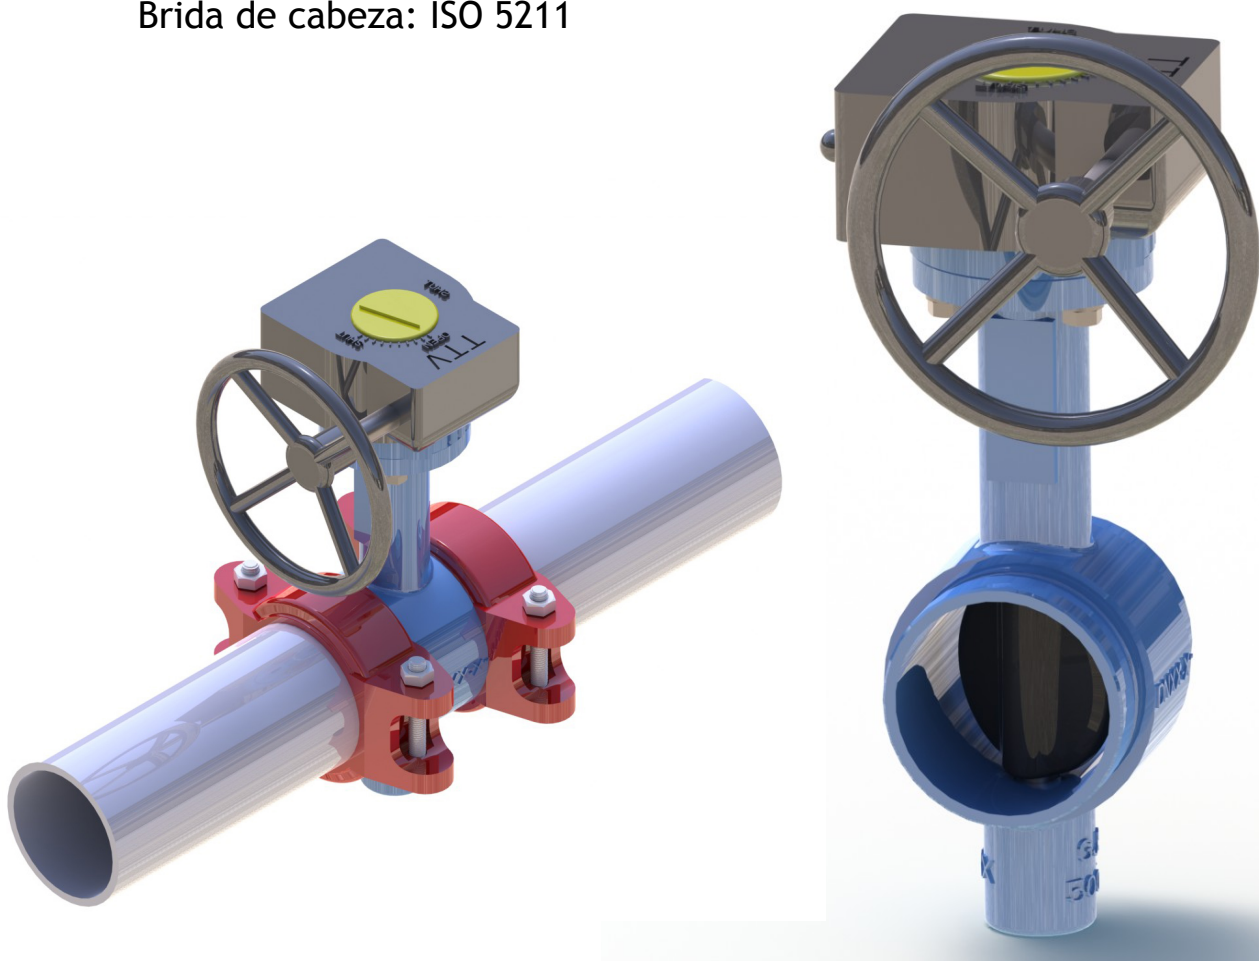

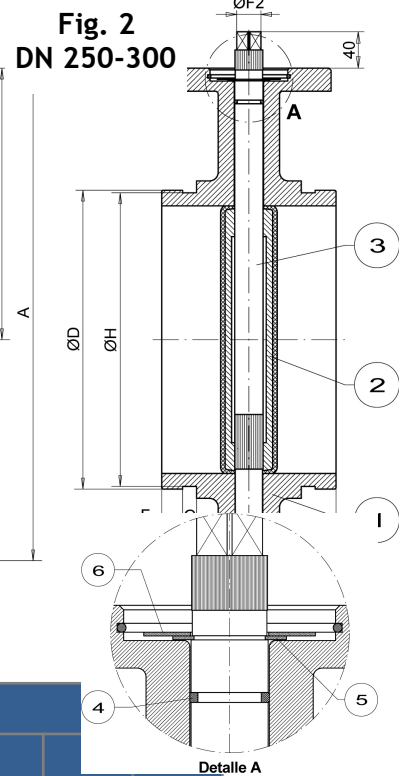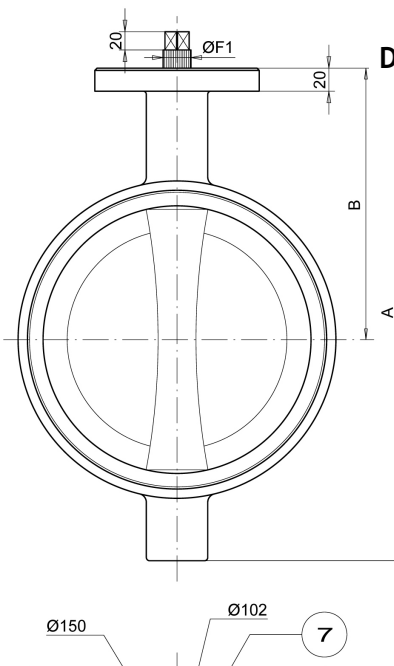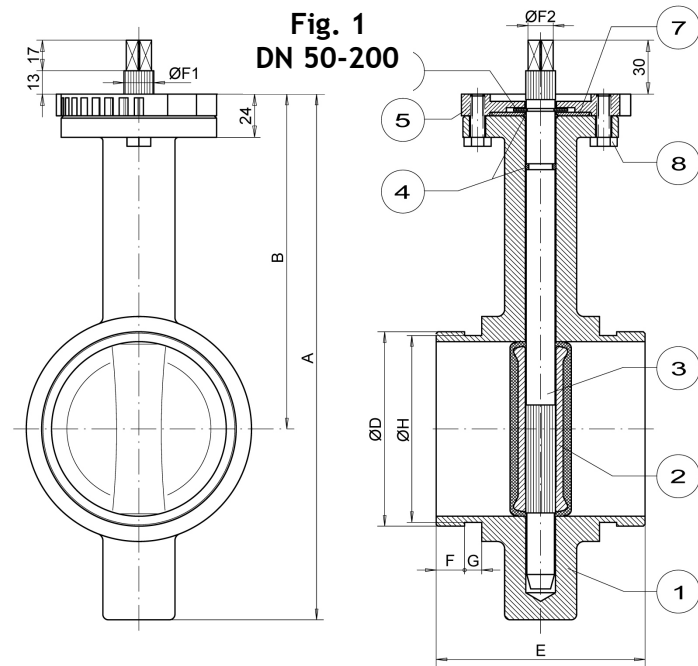

DIMENSIONES DE LA VÁLVULA												
DN		A	B	D	H	E	F	G	J	K	F1	F2
mm	"											
Fig.1 DN. 50-200												
50	2"	217	156	60.3	57.15	81	15.8	7.95	8	88	10.5	9.5
65	2 ½"	243	161	73	69.08	97	15.8	7.95	9	88	14.5	12
65	2 ½"	243	161	76.1	72.26	97	15.8	7.95	9	88	14.5	12
80	3"	262	169	88.9	84.94	97	15.8	7.95	11	88	16.5	14
100	4"	292	187	108	103.78	116	15.8	9.52	11	88	16.5	14
100	4"	292	187	114.3	110.08	116	15.8	9.52	11	88	16.5	14
125	5"	328	206	139.7	135.48	148	15.8	9.52	14	105	18.5	17
125	5"	328	206	141.3	137.03	148	15.8	9.52	14	105	18.5	17
150	6"	352	215	165.1	160.78	148	15.8	9.52	14	105	18.5	17
150	6"	352	215	168.3	163.96	148	15.8	9.52	14	105	18.5	17
200	8"	420	255	219.1	214.4	133	19.05	11.13	17	105	22.5	21
Fig.2 DN. 250-300												
250	10"	450	248	273	268.28	159	19.05	12.7	19	-	25.5	23
300	12 "	510	280	323.9	318.29	165	19.05	12.7	22	-	30.5	26.5