

MODEL NUMBER


TVL-P22GNPM

PRODUCT LINE

Switchbox TVF, TVH, and TVL

SPECIFICATIONS

Enclosure	Tropicalized Aluminum base and lid
Bus/Sensor	(2) SPDT 3A max
Area Classification	Non-incendive
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	NAMUR
Conduit Entries	(2) 1/2" NPT
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

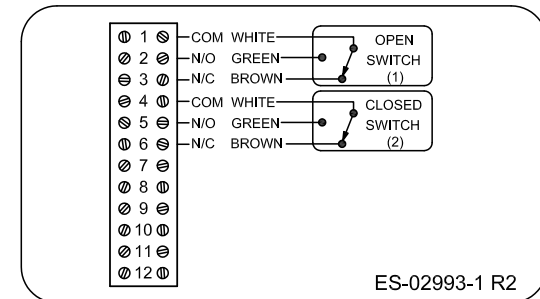WIRING DIAGRAM**NAMEPLATE**

Topworx
3300 Fern Valley Road
Louisville, KY 40213 USA
www.topworx.com


CI I Div 2, Grps A-D; CI II Div 2, Grps F-G; Type 4X
Ex nA nC IIC T4 Gc; Ex tc IIIC T115°C Dc; IP66/68
-40°C ≤ Ta ≤ 55°C
Sira I2ATEX4210X, IECEx SIR 12.0089X
SWITCH: SPDT Reed Switch, 3A, 120VDC

Telemetering Equipment for Hazardous Locations
WARNING: Substitution of components may impair suitability for use in Class I, Division 2 or Zone 2 environments. Must be known to be non-hazardous area before servicing. Enclosure contains aluminum - avoid ignition hazards due to impact or friction. Potential electrostatic charging hazard. Clean only with damp cloth.

AVERTISSEMENT: La substitution de composants peut nuire à l'utilisation en Classe I, Division 2 environnements. Doivent être connus pour être des zones non dangereuses avant l'entretien. Boîtier contient de l'aluminium - éviter inflammation due à des risques d'impact ou de friction. Danger potentiel de charge électrostatique - Nettoyer avec un chiffon humide.

Model #:

Serial #:



Current as of April 19, 2017 – Subject to change without notice.

TOPWORX3300 Fern Valley Road
Louisville, KY 40213(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com**Actuation
Valve**www.actuation.co.uk
tel: +44 (0)151 547 1221
sales@actuation.co.uk